

156 Series Monocrystalline Solar Module

235W, 240W, 245W, 250W, 255W



High Module Conversion Efficiency



Easy Installation and Handling for Various Applications



Withstanding Mechanical Load up to 5400 Pa



Conform with PV Standards: IEC 61215:2005, IEC 61730:2004, UL 1703



ISO9001, OHSAS18001, ISO14001



We provide a 10 years material and workmanship guarantee for our modules. In addition, a 90%-power-output guarantee for 10 years and a 80%-power-output guarantee for 25 years of the modules life are provided.

10-year
material & workmanship

10-year
90% power output


25-year
80% power output



156 Series Monocrystalline Solar Module


235W, 240W, 245W, 250W, 255W

Dimension

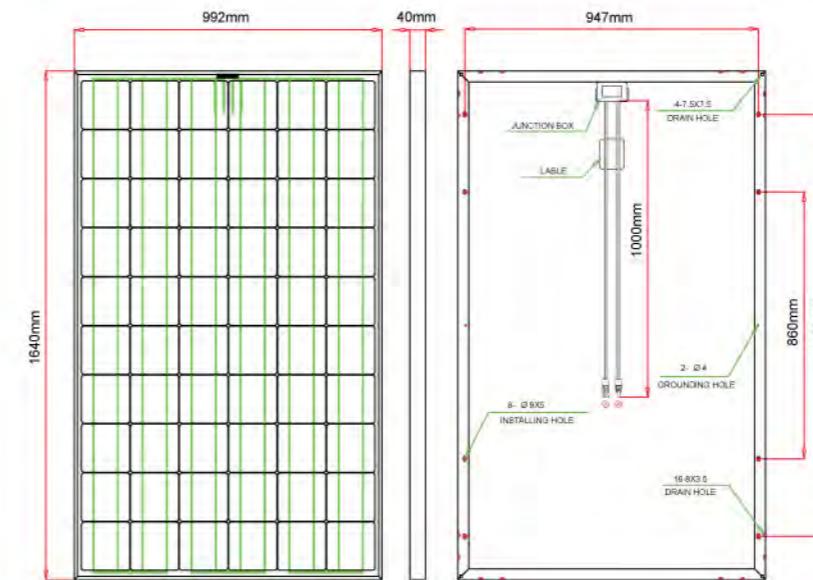

Drawing Only for Reference.

I-V Curves

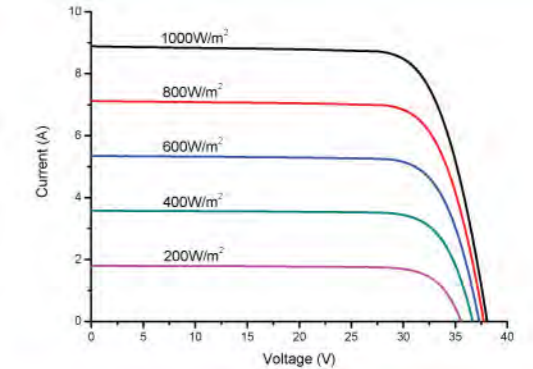

Efficiency at Varied Irradiation

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.7%	16.0%	15.9%	15.9%	15.7%

Electrical Characteristics

	JC235S-24/Db	JC240S-24/Db	JC245S-24/Db	JC250S-24/Db	JC255S-24/Db
Maximum Power (Pmax)	235 W	240 W	245 W	250 W	255 W
Power Tolerance	±3%	±3%	±3%	±3%	±3%
Module Efficiency	14.46%	14.78%	15.08%	15.38%	15.70%
Maximum Power Current (Imp)	7.98 A	8.16 A	8.17 A	8.26 A	8.36 A
Maximum Power Voltage (Vmp)	29.5 V	29.5 V	30.0 V	30.3 V	30.5 V
Short Circuit Current (Isc)	8.56 A	8.71 A	8.72 A	8.78 A	8.89 A
Open Circuit Voltage (Voc)	37.2 V	37.2 V	37.8 V	37.8 V	38.1 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Temperature Coefficient

Temperature Coefficient of Voc	-0.3109%/°C
Temperature Coefficient of Isc	0.0348%/°C
Temperature Coefficient of Pmax	-0.4310%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Mechanical Characteristics

Cell Type	156 x 156 mm Monocrystalline, 60 (6 x 10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Cable Length	1000 mm
Weight	20 Kg
Installation Hole Location	See Drawing Above

Maximum Ratings

Operating Temperature	-40 °C to +85 °C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	20A(EU)/ 15A(US)

Packing Information

Container	20'GP	40'GP	40'HQ
Pallets per Container	12	28	28
Pieces per Container	300	700	770