

## 215 SOLAR PANEL

EXCEPTIONAL EFFICIENCY AND PERFORMANCE

### BENEFITS

#### High Efficiency

Industry leading panel efficiency of 17.3%

#### More Power


SunPower 215 delivers up to 50% more power per unit area than conventional solar panels and 100% more than thin film solar panels

#### Reduced Installation Cost

More power per panel means fewer panels per install. This saves both time and money.

#### Reliable and Robust Design

Proven materials, tempered front glass, and a sturdy anodized frame allow panel to operate reliably in multiple mounting configurations.

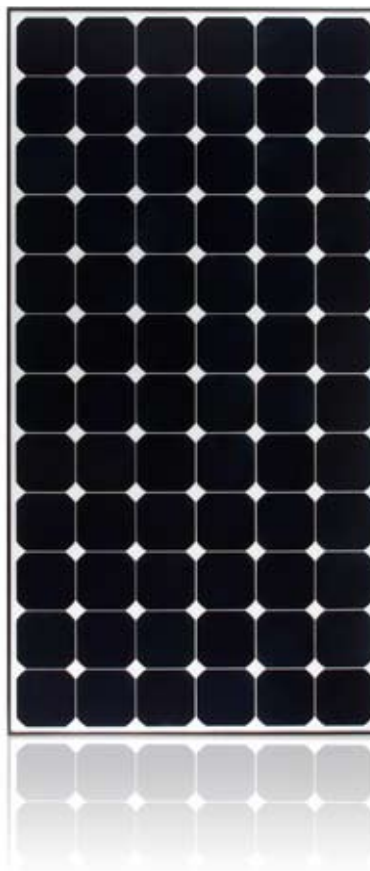

**The SunPower 215 Solar Panel provides industry leading efficiency and performance.** Utilizing 72 next generation SunPower all back-contact solar cells and an optimized panel design, the SunPower 215 delivers an unprecedented total panel conversion efficiency of 17.3%. The 215 panel's reduced voltage-temperature coefficient and exceptional low-light performance attributes provide outstanding energy delivery per peak power watt.

#### SunPower's High Efficiency Advantage - Up to Twice the Power

Comparable systems covering 1000 m <sup>2</sup> / 10,750 ft <sup>2</sup>			
	Thin Film	Conventional	SunPower
Watts / Panel	65	165	215
Efficiency	9.0%	12.0%	17.3%
kWs	90	120	173

#### Electrical Data


Measured at Standard Test Conditions (STC): irradiance of 1000/m<sup>2</sup>, air mass 1.5g, and cell temperature 25 C

Peak Power (+/-5%)	Pmax	215 W
Rated Voltage	Vmp	39.8 V
Rated Current	Imp	5.40 A
Open Circuit Voltage	Voc	48.3 V
Short Circuit Current	Isc	5.80 A
Maximum System Voltage	IEC, UL	1000 V, 600 V
Temperature Coefficients		
	Power	-0.38% /°C
	Voltage (Voc)	-136.8 mV/°C
	Current (Isc)	3.5 mA/°C
Series Fuse Rating		15 A
Peak Power per Unit Area		173 W/m <sup>2</sup> , 16.1 W/ft <sup>2</sup>

#### Mechanical Data

Solar Cells	72 SunPower all back-contact monocrystalline
Front Glass	3.2mm (1/8 in.) tempered
Junction Box	IP-65 rated with 3 bypass diodes
Output Cables	900mm length cable / Multi-Contact connectors
Frame	Anodized aluminum alloy type 6063
Weight	15kg, 33lbs

#### IV Curve

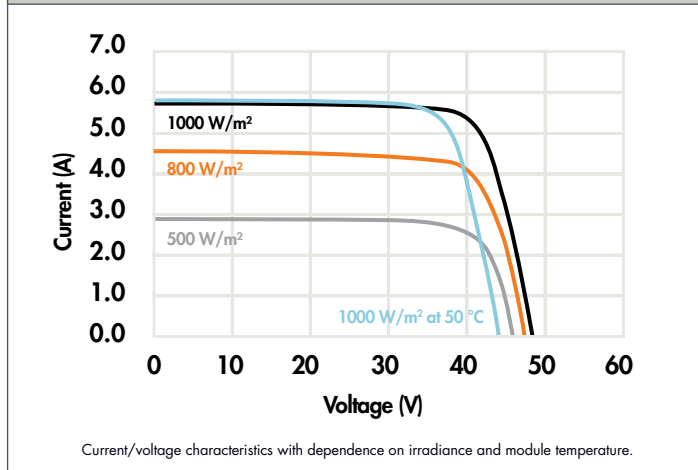


#### Tested Operating Conditions

Temperature	-40° C to +85° C (-40° F to +185° F)
Max load	240 kg/m <sup>2</sup> (2400 Pascals) front and back
Impact Resistance	Hail - 25mm (1 in) at 23 m/s (52 mph)

#### Warranty and Certifications

Warranty	25 year limited power warranty 5 year limited product warranty
Certifications	IEC 61215 , Safety tested IEC 61730; UL listed (UL 1703), Class C Fire Rating

#### Dimensions

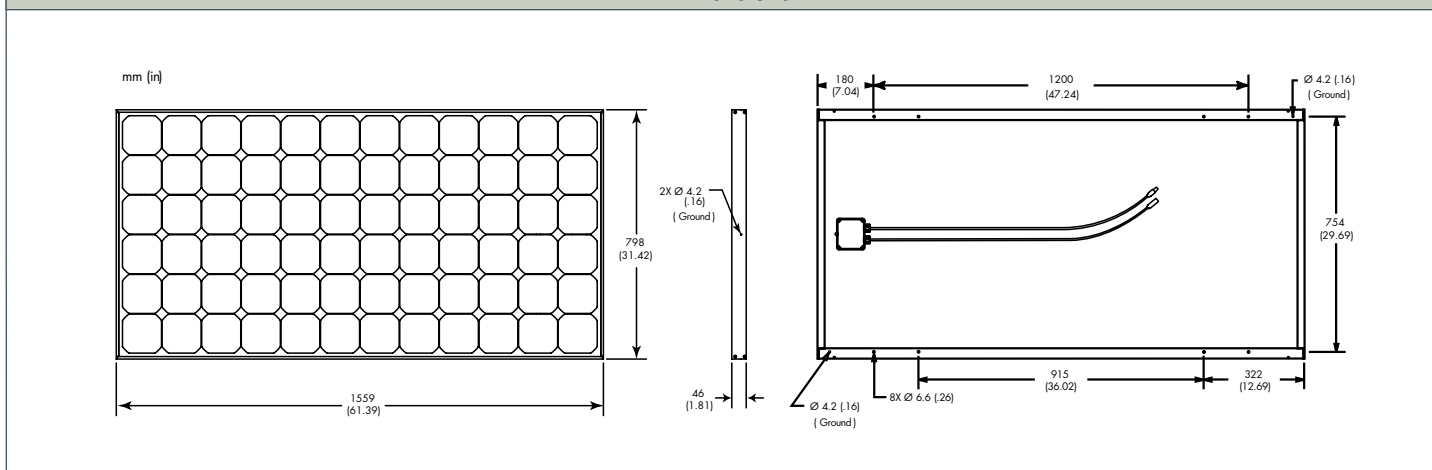

**CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.** Go to [www.sunpowercorp.com/panels](http://www.sunpowercorp.com/panels) for details

#### About SunPower

SunPower designs, manufactures and delivers high-performance solar electric technology worldwide. Our high-efficiency solar cells generate up to 50 percent more power than conventional solar cells. Our high-performance solar panels, roof tiles and trackers deliver significantly more energy than competing systems.